



# KOSSAN PAINT (M) SDN BHD KOSSAN PAINT MARKETING SDN BHD

### CENTRAL HQ

1, Jalan Koporat 1/KU 9, Taman Perindustrian Meru, 42200 Kapar, Selangor Darul Ehsan, Malaysia. Tel: +603-3392 2799 / 4296 / 4297 / 4299 / 4307

Fax: +603-3392 3799

Email: sales@kossanpaint.com.my Website: www.kossanpaint.com

# NORTH MALAYSIA Penang Branch

No. 2A, Lorong Asas Jaya 9, Kawasan Industry Ringan Asas Jaya, 14000 Bukit Mertajam, Pulau Pinang, Malaysia Tel: +604-504 1559 Fax: +604-506 2559 Email: kpmpg@kossanpaint.com.my

# SOUTH MALAYSIA Johor Branch

No. 28 Jalan Maju Cemerlang 1, Taman Perindustrian Maju Cemerlang, 81800 Ulu Tiram, Johor, Malaysia. Tel: +607-859 0299 Fax: +607-859 0229 Email: kpmjb@kossanpaint.com.my

## EAST MALAYSIA Sandakan Branch

Ground Floor, Lot 1 & 2, Block K, Bandar Ramai-Ramai, Leila Road, P.O. Box 317, 90703 Sandakan, Sabah, Malaysia Tel: +6089-272 417 Fax: +6089-272 451 Email: kpmsdk@kossanpaint.com.my

#### Kota Kinabalu Branch

Lot SD 39 Semi-Detached Warehouse, Lorong Industrial Warisan 3, Taman Industrial Warisan Indah, KM 11.2, Jalan Tuaran, Inanam, 88450 Kota Kinabalu, Sabah, Malaysia. Tel: +6088-383 457 Fax: +6088-382 457 Email: kpmkk@kossanpaint.com.my

#### Sibu Branch

No. 6B, 2/L 10, Wong Ting Hock 1/2 Miles, 96000 Sibu, Sarawak, Malaysia.
Tel: +6084-326 291 H/P: 016-220 6291 Email: kpmsibu@kossanpaint.com.my

#### Bintulu Branch

No.263 (L8414), Ground Floor, Bintulu Sentral, Jln. Kidurong, 97000 Bintulu, Sarawak, Malaysia. Tel: 084-326 291 H/P: 016-220 6291 Email: kpmsibu@kossanpaint.com.my



# POLYURETHANE SCREED FLOORING MF/HD







Name Behind Quality

# **Polyurethane Flooring**

Polyurethane resin floor screeds have a proven track record when it comes to concrete floor surfacing in food related industries. Their service life is exemplary in demanding environments such as chemical processing plants, wet and dry food production, brewing, and engineering industries. Polyurethane floor screeds also have exceptional performance in heavily traffic areas.

Designed as a practical, robust floor screed, polyurethane flooring systems have extremely good chemical resistance with excellent wear, abrasion and impact resistance. Almost as a bonus the PU screeds can also be steam cleaned unlike many other flooring systems.

The resin floor finish when cured has an easily cleaned, matt appearance and can be produced in an attractive range of colours. The non slip characteristics of the resin screed are ideally suited for wet work areas and personnel safety.

## **Area Of Application**

Area use for GMP, HYGIENIC, HACCP industrial floors for wet food processing, beverage, seafood, meat, kitchen, cold storage, freezer (cool room), palm oil processing and wet packaging plants.

Food Industries
Cold Storage
Pharmaceutical Industrial

Logistics Area / Warehouse / Packaging Plants Palm Oil Processing Aircraft Hanger Steel Mill Paper Mill Production Area Wet Market Central Kitchen

# **POLYURETHANE SCREED FLOORING MF/HD**



KPU-MF Green



KPU-MF Cream



KPU-MF Light Grey



KPU-MF Brilliant Blue



KPU-MF Buff



**KPU-MF Traffic Grey** 



KPU-MF Red



KPU-MF Orange Brown



KPU-MF Grey

# **Polyurethane Floor System**

# **KOSFLOR FCS-3400 (MF-CPU)**

# 3-6mm Self-Smoothing Polyurethane MF-CPU Flooring System

A 3 component, self-smoothing, seamless Polyurethane industrial floor topping. It offers high mechanical, excellent chemical and thermal shock resistance properties.















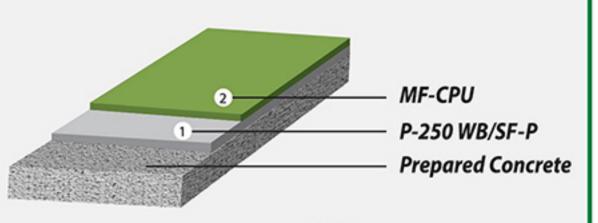

\*Matt

\*Typical thickness: 3mm

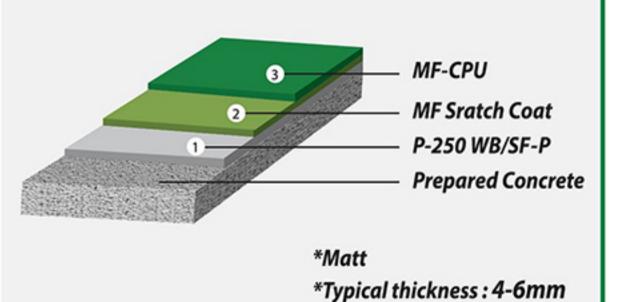


# **KOSFLOR FCS-3600 (HD-CPU)**

# 6-12mm Self-Smoothing Polyurethane HD-CPU Flooring System

A thermal shock polyurethane mortar screed applied in thickness from 6-12mm floor coating. Seamless, high mechanical properties, high chemicals, anti-slip, heat and cool resistance with texture matt finish.



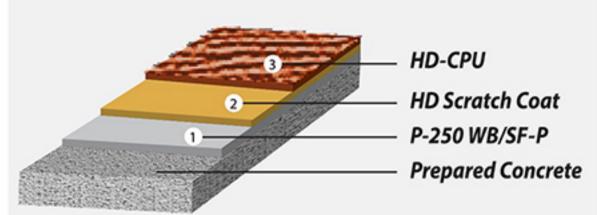

\*Anti-Slip

\*Typical thickness: 6-12mm











<sup>\*</sup> The colours shown in this colour card are meant as a guide only. The colours may be appear slightly different to our finishing products.